

The Short Version

Open a door by actuating the handle from the other side of the door. Think hotel rooms.


Under Door Tool

The Long Version

This is simple but very effective. Many commercial doors will **unlock from one side** using **just the handle** and automatically **disengaging other locking mechanisms**. Hotel rooms are the classic example.

You need a gap under the door of around 4.5mm or more.

- 1) Measure the height of the handle relative to the height of the UDT on your side of the door.
- 2) Put the UDT under the door, ensuring you hold onto the handle and end of the pull string.
- 3) Bring the tool upright in the centre of the door. You'll hear / feel the end of the tool touch the door.
- 4) Slide the tool along so the end of the tool will be positioned above the handle. The pull string should be dangling between the handle and the door.
- 5) Pull down on the string. You'll have to pull a lot harder than you expect. The tool will flex and pull on the handle. The door will open.

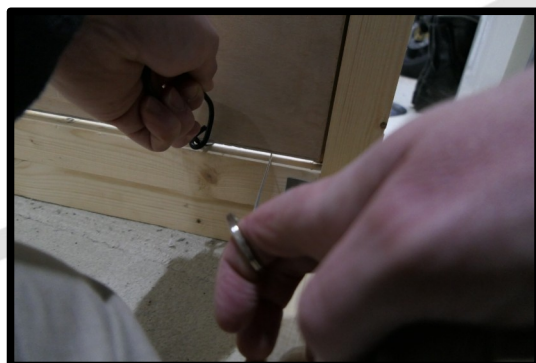

Enquiries@StyxSecurity.org

We don't knock.